


4 ISA Bus Backplane

I. Board Dimensions

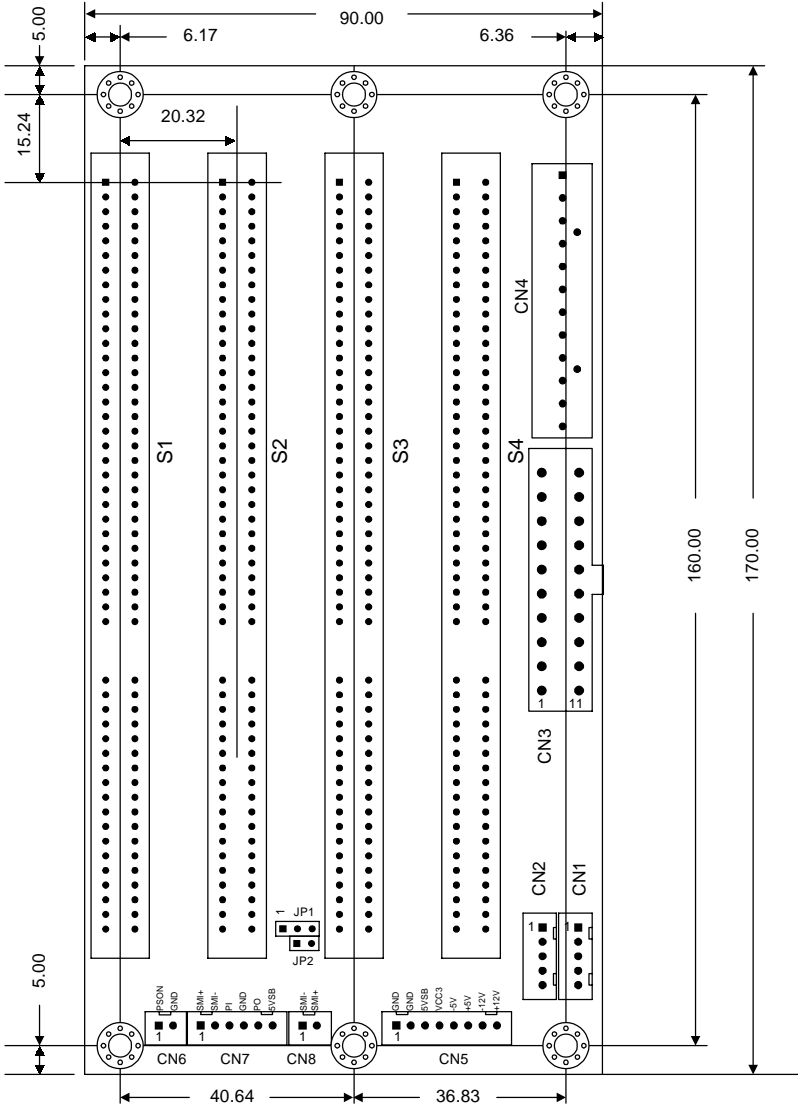

II. Jumper Settings & Connectors

Embedded Control Logic Settings

Jumper	Description
JP2	Open: System power ON/OFF via JP1 Short: System power ON/OFF via power supply switch
JP1	Short 1-2: System power ON/OFF either by front panel power button CN6 or via ACPI compliant Microsoft Windows software Short 2-3: System power ON/OFF via front panel power button CN6
CN6	Power ON/OFF push button connector to front panel
CN7	6-pin cable to CPU card; used for Microsoft Windows Soft-power ON/OFF (ACPI compliant)
CN8	External SMI connector to front panel

III. Pin Assignments

20-pin ATX Power Connector: CN3

Brown	3.3V	11	1	3.3V	Brown
Blue	-12V	12	2	3.3V	Brown
Black	GND	13	3	GND	Black
Green	PS-ON	14	4	5V	Red
Black	GND	15	5	GND	Black
Black	GND	16	6	5V	Red
Black	GND	17	7	GND	Black
White	-5V	18	8	PW-OK	Orange
Red	5V	19	9	5VSB	Purple
Red	5V	20	10	12V	Yellow

ATX6020/4 User's Manual

4 ISA Bus Backplane

Standard PS/2 Power Connector: CN4

Pin	Signal	P8 & P9 Color
1	NC (P.G.)	orange
2	+5V _{DC}	red
3	+12V _{DC}	yellow
4	-12V _{DC}	blue
5-8	GND	black
9	-5V _{DC}	white
10	+5V _{DC}	red
11-12	+5V _{DC}	red

External Power Connector: CN5

1	GND
2	GND
3	5VSB
4	3.3V
5	-5V
6	+5V
7	-12V
8	+12V

Keyboard Connectors: CN1, CN2

1	KBCLK
2	KBDATA
3	No Connector
4	GND
5	Vcc

©Copyright 1999 by AXIOM Technology Co., Ltd.
All rights reserved.
August 1999, Version A1
Printed in Taiwan

Trademarks Acknowledgments

AXIOM is a trademark of AXIOM Technology Co., Ltd.
Other brand names and trademarks are the properties and registered brands of their respective owners.

Specifications are subject to change without notice.